





**MyTe**

Lifting Equipment

# CHAIN BLOCK



# Chain Block Specifications

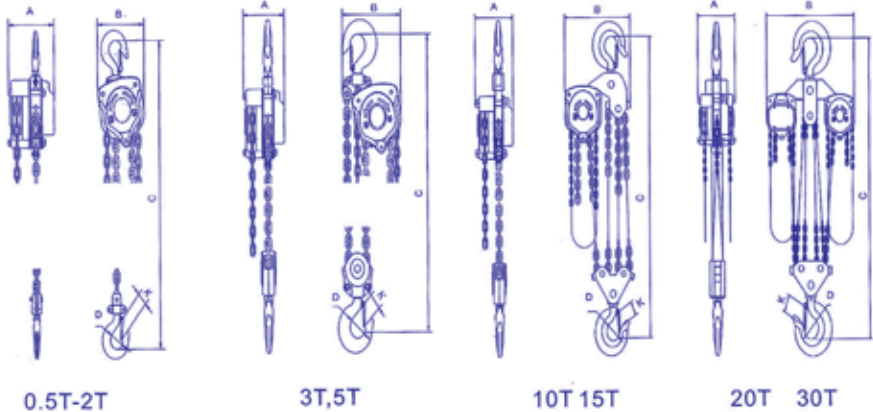

Capacity	t	0.5	1	1.5	1.5	2	2	3	3	5	5	7.5	10	10	15	20	20	30	
Standard lift	m	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
Running test load	KN	7.5	15	22.5	22.5	30	30	45	45	75	75	112.5	150	150	225	300	300	450	
Effort required to lift rated load	N	225	300	310	350	300	310	350	370	400	415	415	410	415	420	410*	410*	410*	
Diameter of load chain	mm	5	6	7.1	8	6	8	7.1	8	9	10	10	9	10	10	9	10	10	
Strands of load chain		1	1	1	1	2	1	2	2	2	2	3	4	4	6	8	8	12	
Dimensions	A	mm	132	152	152	155	152	185	152	155	185	189	189	185	189	194	220	224	274
	B	mm	152	157	180	180	170	207	207	207	267	267	380	380	380	400	440	440	649
	C	mm	315	355	375	375	405	430	500	500	680	680	650	750	750	880	940	940	1100
	D	mm	34	38	48	48	48	48	50	50	57	57	72	80	80	85	106	106	120
	K	mm	27	27	36	36	36	36	38	38	48	48	47	51	51	58	70	70	80
Net weight	kg	8.5	11	13.5	14.5	14.5	17.5	20.5	23	36.5	39.5	44	60	65	102	146	156	246	
Packing measurement	CM	34.5x19x14	36x19x18	38.5x21x18	38.5x21x18	41x23x18	46x23.5x20	54x23.5x23	54x23.5x23	69x29x23	69x29x23	77x42x23	77x42x23	87x42x23	97x48x23	116x71x23	116x71x23	146x71x23	
Extra weight per metre of extra lift	kg	1.3	1.6	2	2.3	2.2	2.3	3.2	3.7	4.5	5.3	7.5	8.1	9.7	14	16.2	19.3	28.2	

★ As our products are incessantly being improved and developed, their structures may be slightly different from this instruction.

**Subject to technical changes without prior notice.**