


Grade 80 Chain



All dimensions are expressed in mm and are subject to commercial tolerances

Max-alloy Gr8 Alloy Chain

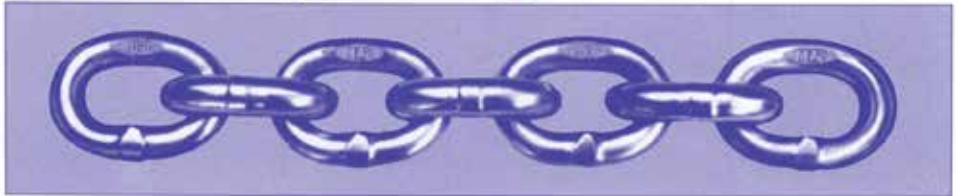

MAB and batch/traceability marks, the mark of MMAX-Alloy quality grade 800 (T) chain, the grade that should always be used for sling or lifting applications.

CHAIN SIZE - d (nom)	6,00	7,00	8,00	10,00	13,00	16,00	20,00	22,00	25,50	32,00
INSIDE LINK LENGTH	18,00	21,00	24,00	30,00	39,00	48,00	60,00	66,00	78,00	96,00
OUTSIDE WIDTH - Max	22,20	25,90	29,80	37,00	48,10	59,20	74,00	81,40	96,20	118,00
APPROX. LINKS per m	55,50	47,00	41,70	33,30	25,60	20,80	16,70	15,20	12,80	10,40
APPROX. kg per metre	0,80	1,09	1,43	2,22	3,78	5,70	8,92	10,77	15,04	22,79
WLL - t	1,20	1,60	2,00	3,20	5,40	8,20	12,80	15,50	21,70	32,80

100% proof tested

All MYTE chain slings are fitted with Max Alloy chain, we can also offer Max Alloy Grade 80 and Grade 1000 chains and fittings upon request.

Please request a catalogue from your local MYTE agent.

Working Load Limits


Chain Size	1 Leg					2 Leg				Uneven Load 90°	3 / 4 Leg			
	0°	Choke Hitch	Endless Basket	Endless Reaving	60°	90°	120°	Choke Hitch	60°		90°	120°	Choke Hitch	
(mm)	(t)	(t)	(t)	(t)	(t)	(t)	(t)	(t)	(t)	(t)	(t)	(t)	(t)	
7	1,50	1,20	1,95	2,40	2,55	2,10	1,50	1,65	1,47	3,90	3,15	2,25	2,55	
8	2,00	1,60	2,60	3,20	3,40	2,80	2,00	2,20	1,95	5,20	4,20	3,00	3,40	
10	3,15	2,52	4,10	5,04	5,36	4,41	3,15	3,47	3,09	8,10	6,62	4,73	5,36	
13	5,30	4,24	6,89	8,40	9,01	7,42	5,30	5,83	5,19	13,70	11,10	7,95	9,01	
16	8,00	6,40	10,40	12,80	13,60	11,20	8,00	8,80	7,81	20,00	16,00	12,00	13,60	
20	12,50	10,00	16,25	20,00	21,25	17,50	12,50	13,75	12,25	30,50	24,25	18,75	21,25	
22	15,00	12,00	19,50	24,00	25,50	21,00	15,00	16,50	14,70	39,00	31,50	22,50	25,50	
30	21,20	16,90	27,50	33,92	36,04	29,98	21,20	23,32	20,78	55,12	44,52	31,80	36,04	
32	31,50	25,20	40,95	50,40	53,55	44,10	31,50	34,65	30,87	81,00	66,15	47,25	53,55	

Load Factor

---	1,00	0,80	1,30	1,60	1,70	1,40	1,00	1,10	0,70	2,00	2,10	1,50	1,70
-----	------	------	------	------	------	------	------	------	------	------	------	------	------

Factor of Safety 4:1

Endless Round Slings

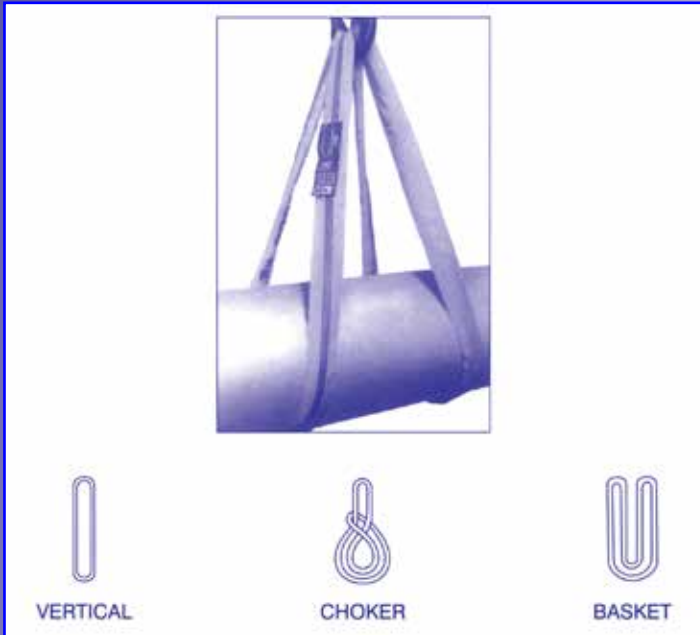

- LIGHTWEIGHT SOFT SLINGS AVAILABLE IN LENGTH AND LIFTING CAPACITY FROM 1 TON TO 300 TON -
 - MADE OF HIGH TENSILE YARN IN A CONTINUOUS SPUN LENGTH ENCASED IN MATCHED PROTECTIVE SLEEVE -
 - MULTI-LEG SLING MADE TO ORDER -
 - ALL SLINGS ARE MANUFACTURED TO COMPLY WITH DIN EN 1492/2/2000 -
 - SANS 94-2:2003 APPROVED -
- SAFETY FACTOR 7 : 1**

Endless round	violet	green	yellow	grey	red
Flat duplex	50mm	60mm	90mm	120mm	150mm
Vertical	1t	2t	3t	4t	5t
Choker	0.8t	1.6t	2.4t	3.2t	4t
Basket	2t	4t	6t	8t	10t