

MYTE

Lifting Equipment

**Manufactured to
SANS & EN Specifications**



MAGNETS & WIRE ROPE WINCHES

HOIST | MAGNET LIFTER & WIRE ROPE WINCH

PERMANENT MAGNET LIFTER

TC

- Strong permanent magnetic circuit
- Stable and lasting working performance
- Strong pull-off strength
- High safety factor and reliable quality

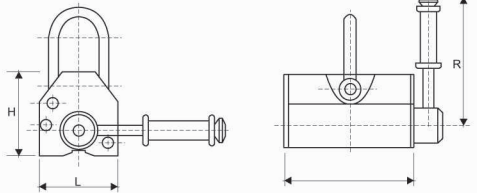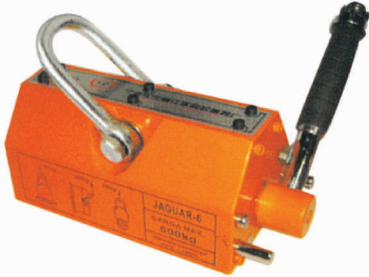

TC Model safety factor 3.5:1

Model	Rated Lifting Strength (kgf)	Cylindrical Lifting Strength (kgf)	Max. Pull-off Strength (kgf)	Dimension (mm) L B H R	Operation Temperature (°C)	Net. Weight (kg)
TC100	100	50	350	62 92 67 140	<80	3
TC300	300	150	1050	92 163 93 180	<80	10
TC500	500	250	1750	120 216 116 220	<80	21
TC600	600	300	2100	122 234 118 220	<80	24
TC1000	1000	500	3500	172 264 168 260	<80	50
TC2000	2000	1000	7000	232 370 221 450	<80	125
TC3000	3000	1500	10500	274 453 266 520	<80	200
TC5000	5000	2500	17500	296 720 266 700	<80	398

ZNL



Cast Aluminum Housing

Model	NHSS0.8	NHSS1.6	NHSS3.2	NHSS5.4
Rated Capacity	tons 0.8	1.6	3.2	5.4
Pulling Capacity	tons 1.2	2.4	4.8	8.1
Rated Forward Travel	mm ≥52	≥55	≥28	≥25
Efficient Length of Forward handle	mm 825	1200	1200	1200
Drive Step	1	1	2	2
Rope Diameter	mm 8.3	11	16	20
Standard Length of Rope	m 20	20	20	20
Net Weight	Kg 16	24	32	90
Rated Forward Hand Power	N ≤341	≤400	≤438	≤550
Max. Overall Size	mm 426x64x238	545x97x284	660x98x325	930x390x150

